

Waste Oil Disposals and Oil, Grease & Water supplies

Waste Oil Suction Units

VENTURI System

mobile, 2 airline connections
 recommended air pressure: 6 bar
 male quick release adapter G1/4, NW 7.2,
 for rectus coupling
 with suction hose 2 m with spiral spring
 lever ball valve with suction probe adapters
 for: VW/Audi, Mercedes, BMW, Smart

2 fixed rear wheels, 2 front castor wheels,
 standard body lacquering: grey satin RAL 7040

Art. No. **27 622** 75 l

Art. No. **27 632** 75 l

with visual inspection reservoir 7 l



Waste Oil Drainers-/Suction Units

VENTURI System

mobile, 2 airline connections, Ø drain bowl 420 mm,
 telescopic height level: 1180 - 1750 mm
 male quick release adapter G 1/4, NW 7.2,
 for rectus coupling
 with transparent discharge hose
 lever ball valve with suction probe adapters
 for: VW/Audi, Mercedes, BMW, Smart

2 fixed rear wheels, 2 front castor wheels,
 standard body lacquering: grey satin RAL 7040

Art. No. **27 622 680** 75 l

Art. No. **27 632 680** 75 l

with visual inspection reservoir 7 l



Hose Reels for Oil - Grease and Water/Air supply

Wall/Floor mounting versions
 open or encased hose reels

Art. No. open	Art. No. encased	hose reel	bar	DN	connection threads	hose length
29 142	29 172	oil	120	12	G 1/2" male and female	10 m
29 143	29 173	oil	120	12	G 1/2" male and female	15 m
29 242	29 272	grease	400	6	G 1/4 " male and female	10 m
29 243	29 273	grease	400	6	G 1/4 " male and female	15 m
29 442	29 472	water/air	20	10	G 3/8" male and female	10 m
29 443	29 473	water/air	20	10	G 3/8" male and female	15 m
29 542	29 572	cooling agent	120	12	G 1/2" male and female	10 m
29 543	29 573	cooling agent	120	12	G 1/2" male and female	15 m



Water & Air Hose Reels

Water Hose Reels WS 32

light, practical and mobile water hose extension, special hose with textile inlay and spiral wound cross-weave, with a spraying nozzle with waterstop and a top connector, drum made of special highly breakproof plastic, strong carrying frame made of galvanized tubular steel
hose length 20m, Ø 1/2"

Art. No. **1237120**



Compressor Hose Reels

with high-quality fabric hose, oil-resistant, up to 15 bar of pressure, complete with quick release couplings, drum made of special highly breakproof plastic

A) standard

Art. No. **1127020**


frame made of steel tubing with bright galvanized zinc coating, hose length 20m, Ø 6 x 12 mm



B) anti twist

Art. No. **1127030**

with axial connection permitting rolling up or out during operation, throughflow system, with connection hose, suitable for wall mounting, frame made of steel tubing with bright galvanized zinc coating, hose length 20m, Ø 9 x 15 mm

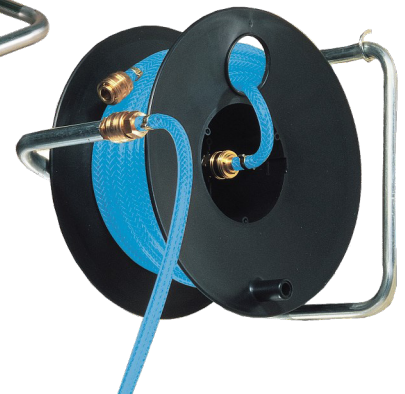

Automatik-Box Air ABA 10 D

- 10 m + 2 m highly flexible hose made of polyurethan, suitable for air or cold water
- hose Ø 8/12 mm for max. working pressure 12 bar
- with comfortable automatic reeling with ratchet hose release
- 1/4" connections

Art. No. **1240320300**

